


EL006 & EL007 Range

This new LED exit sign uses high illumination green LED's, in a small compact shell. Due to its low energy requirement from the mains power supply and the life span of the LED's and batteries, makes this unit exceptionally economical over its life. From this new technology we have been able to reduce the size of the overall unit to provide you with a compact internal use, IP42 rated, emergency exit sign. The various mounting methods mean it can be used for a large variety of uses. This is an attractive alternative to a standard suspended or recessed exit sign.

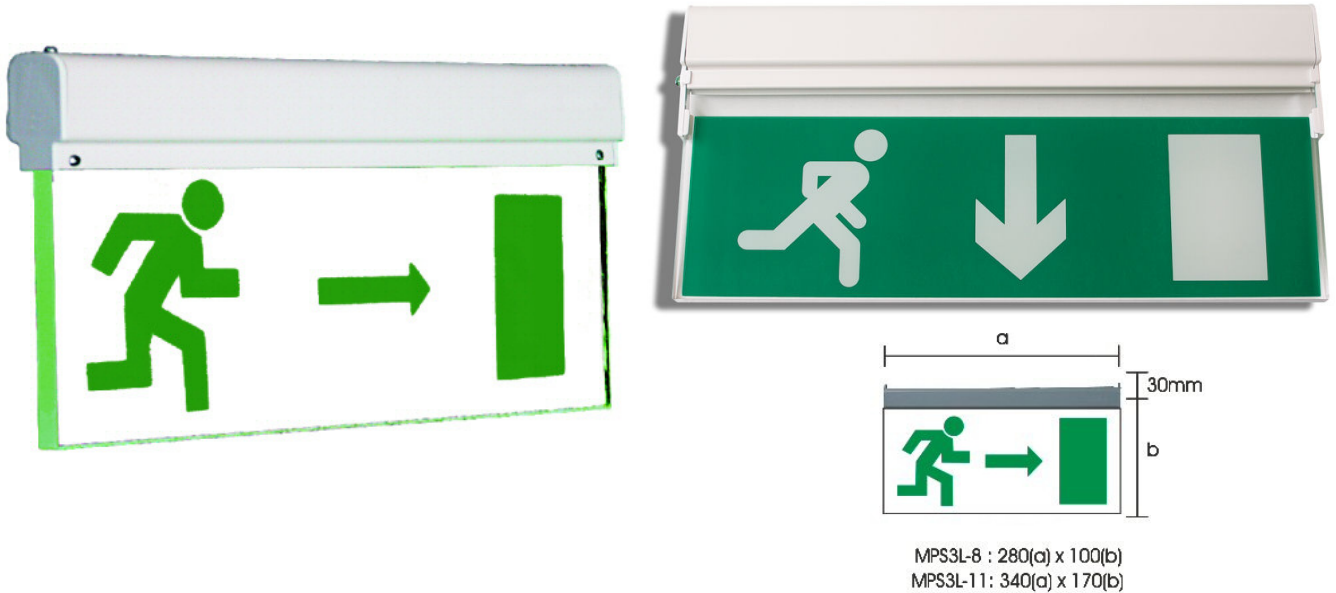

Now available - A traditional screen printed sign illuminated with white LED's

Features

- ▶ Elegant Slim profile appearance
- ▶ Indication arrow is user placed
- ▶ 18 Metre viewing distance MPS3L-8
- ▶ 32 Metre viewing distance MPS3L-11
- ▶ Operation temperature 0°C to 50°C
- ▶ Up to 95% relative humidity
- ▶ Green or white high output LED's

	Mode	Lamp Type	Battery	Power Con	Duration	Weight	Output	Sign Dimensions
MPS3L-8	Maintained		3.6V 1Ah	5VA	3 Hours	0.5 KG		
MPS3L-8/NM	Non Maintained	8 Led's	3.6V 1Ah	5VA	3 Hours	0.5 KG	5100mcd/120°	280mm x 100mm x 8mm
MPS3L-8/SL/110	110V Slave		N/A	3VA	N/A	0.4 KG		
MPS3L-11	Maintained		3.6V 1Ah	6VA	3 Hours	0.8 KG		
MPS3L-11/NM	Non Maintained	11 Led's	3.6V 1Ah	6VA	3 Hours	0.8 KG	7000mcd/120°	340mm x 170mm x 8mm
MPS3L-11/SL/110	110V Slave		N/A	3VA	N/A	0.4KG		
White LED with green sign								
MPS3L-8/W	Maintained		3.6V 1Ah	5VA	3 Hours	0.5 KG		
MPS3L-8/W/NM	Non Maintained	8 Led's	3.6V 1Ah	5VA	3 Hours	0.5 KG	5100mcd/120°	280mm x 100mm x 8mm
MPS3L-8/W/SL/110	110V Slave		N/A	3VA	N/A	0.4 KG		

