

# Electro Magnetic Locks




## Mini Series Electro Magnetic Lock Single

Fitting : Surface  
 Operation : Fail Unlocked  
 Voltage : 12V DC / 24V DC  
 Current : 12V DC = 0.48A  
           24V DC = 0.24A  
 Holding Force : 250kg/550lbs  
 Monitored : Yes (AS8530 only)  
 Material : Aluminium

### FEATURES

Continuously rated.  
 Satin anodised aluminium finish.  
 Monitored version - C/NO/NC contacts.  
 Monitoring is hall effect.

AS8529  
 AS8530



	Length	Height	Depth
Magnet	250	42	25
Armature	185	38	8


## Standard Series Electro Magnetic Lock Single

Fitting : Surface  
 Operation : Fail Unlocked  
 Voltage : 12V DC / 24V DC  
 Current : 12V DC = 0.48A  
           24V DC = 0.24A  
 Holding Force : 510kg/1120lbs  
 Monitored : Yes (AS8535 only)  
 Material : Aluminium

### FEATURES

Continuously rated.  
 Satin anodised aluminium finish.  
 Monitored version - C/NO/NC contacts.  
 Hall monitoring.

AS8534  
 AS8535



	Length	Height	Depth
Magnet	266	73	40
Armature	160	61	16



**Hoyles Electronic Developments Ltd**

T. 01744 886600

F. 01744 886607

E. sales@hoyles.com

W. www.hoyles.com

# Mini Z & L Brackets




## 'Z + L' Bracket For Mini Series

### FEATURES

- To suit inward opening doors.

AS8522



	Length	Height	Depth
Adjustable Plates	160	50	50
'L' Bracket	250	48	30

## 'L' Bracket For Mini Series

### FEATURES

- To suit outward opening doors.

AS8521



	Length	Height	Depth
	250	48	30



**Hoyles Electronic Developments Ltd**

T. 01744 886600

F. 01744 886607

E. [sales@hoyles.com](mailto:sales@hoyles.com)

W. [www.hoyles.com](http://www.hoyles.com)

# Standard Z & L Brackets




## 'Z + L' Bracket For Standard Series

### FEATURES

- To suit inward opening doors.

AS8524




	Length	Height	Depth
Armature 'Z' Plates	160	63.5	63.5
Magnet 'L' Bracket	266	76	46

## 'L' Bracket For Standard Series

### FEATURES

- To suit outward opening doors.

AS8523



	Length	Height	Depth
	266	75.5	38



**Hoyles Electronic Developments Ltd**



T. 01744 886600

F. 01744 886607

E. [sales@hoyles.com](mailto:sales@hoyles.com)

W. [www.hoyles.com](http://www.hoyles.com)

# Lock Fitting Guide

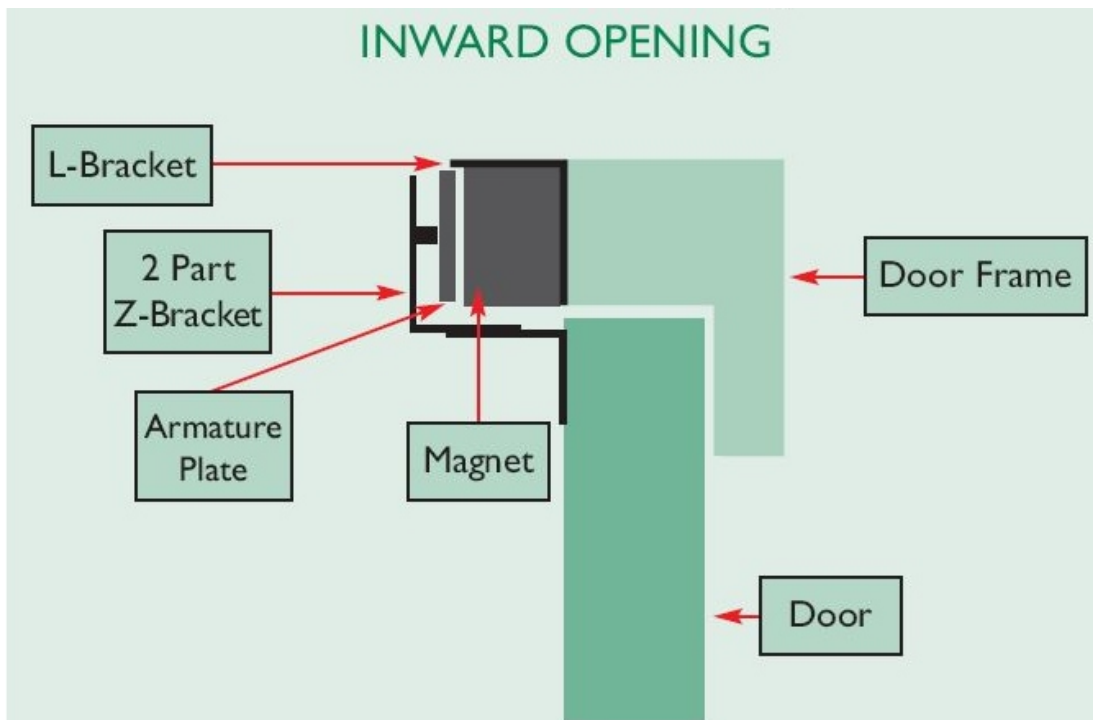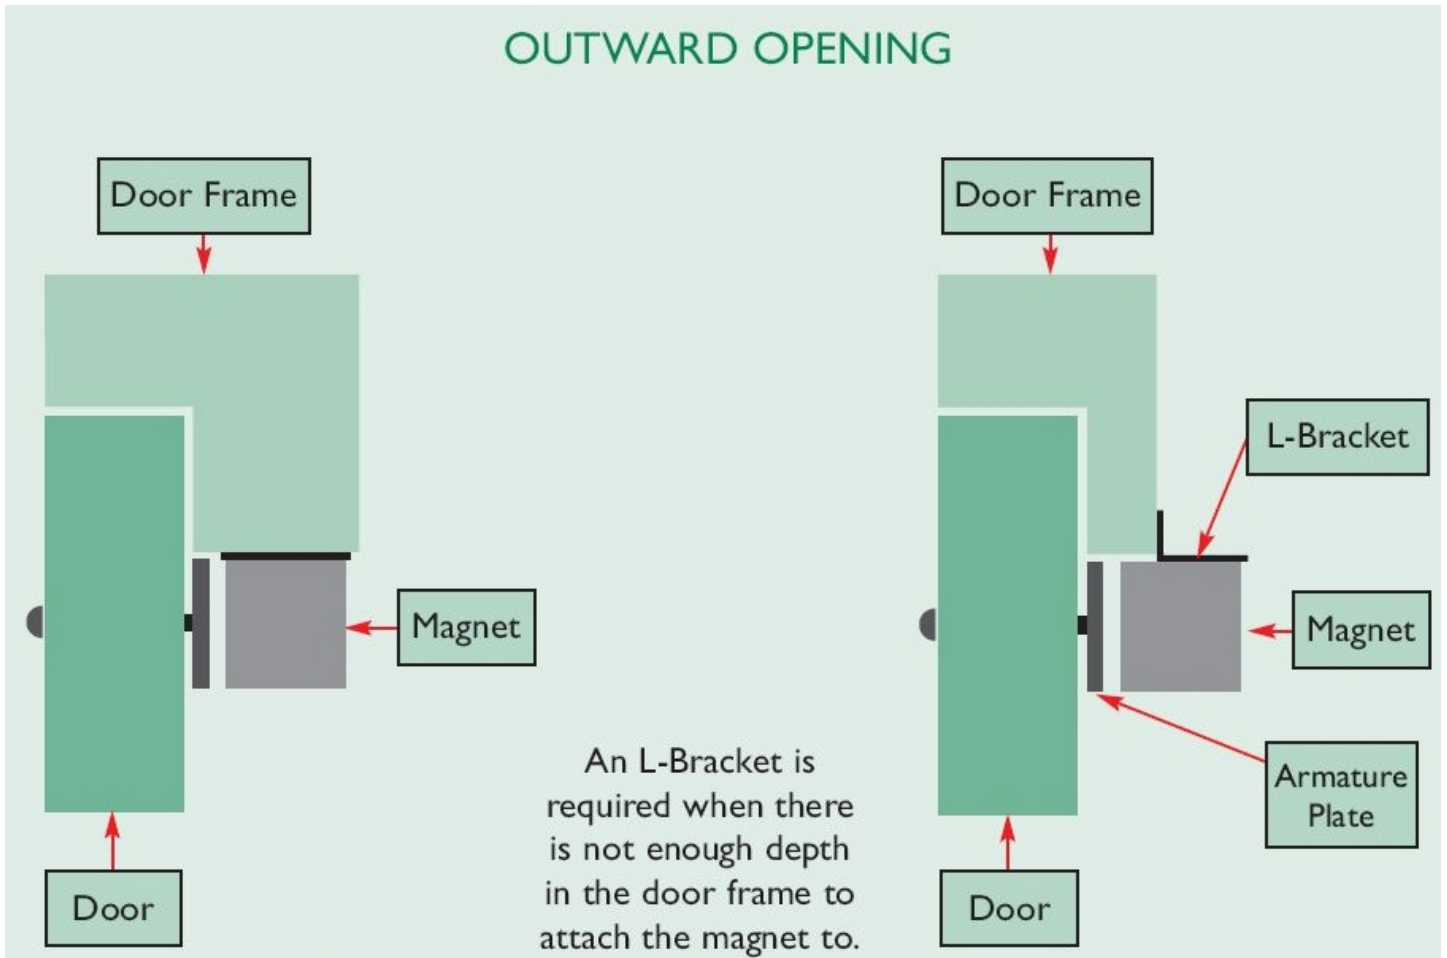

**Hoyles Electronic Developments Ltd**

T. 01744 886600 F. 01744 886607 E. sales@hoyles.com W. www.hoyles.com