

Product Information Sheet

Cig-Arrête Xenon Beacon (Part No CSA-XBN)



Xenon Beacon (Flasher Unit)

The Cig-Arrête Xenon Beacon provides a visual confirmation that an alarm has been generated by the Cig-Arrête System. Used in conjunction with the CSA-246 or CSA-110 power supply units, the beacon is connected as shown in the diagram below.


Other Cig-Arrête Sounder Beacons



Combined Sounder /Beacon (Part No CSA-CSB)

The Cig-Arrête Combined Sounder Beacon provides both a visual and audible indication that an alarm has been generated by the Cig-Arrête System. Used in conjunction with the CSA-246 or CSA-110 power supply units, the sounder/beacon is connected as shown in the diagram below.

Wiring Diagram & Specifications

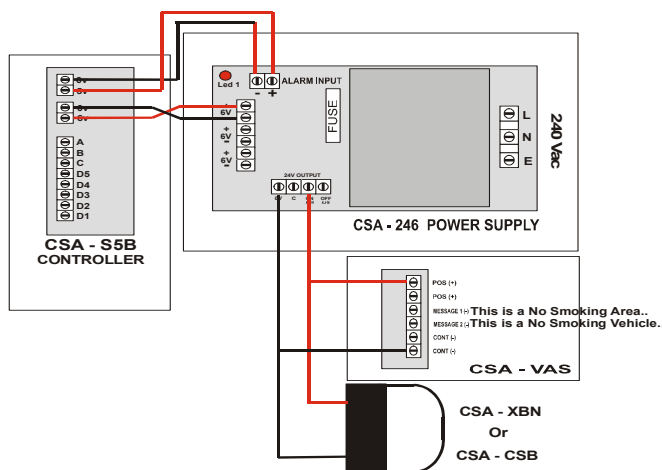

	CSA-XBN	CSA-CSB
Input Voltage	24V dc	24V dc
Input Current	40 mA	50 mA
Sound Output	N/A	103 dBa
IP Rating	IP65	IP65
Frequency	N/A	800/1000Hz
Temp Range	-20 to +70 C	-20 to +70 C
No Of Tones	N/A	4

