Single Gang Multi-Function Buttons with Integral Sounder and LEDs – S1760P range


S1760P (R, G, Y or B) Button with 2 x LEDs (Red, Green, Yellow or Blue), integral sounder and engineer changeable label. The buttons can be programmed in a number of different ways with on board jumpers. Supplied with an ABS back box for surface mounting but can be semi flush mounted using a single gang galvanised back box.

The contacts are configured by jumpers J1 and J2 as follows:

Momentary Action Mode Dwell Mode	Contacts change when button is pressed and restore when button is released. Contacts change when button is pressed and restore 5 seconds after the button is released.	J1at X, J2 at X J1at Y, J2 at X
Commutating Mode	Contacts change when button is pressed and restore when the button is pressed again.	J1at X, J2 at Y
Double Press Mode	Contacts only change if button is pressed twice within 1 sec or held pressed for 2 secs. This helps prevent accidental operation. They restore 5 secs after the button is released.	J1at Y, J2 at Y

Link L to -ve to disable the LEDs

Link B to -ve to disable the sounder

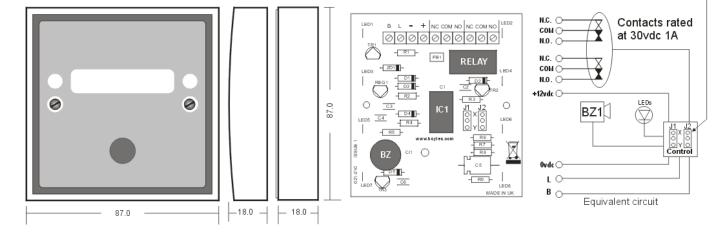

The S1760P comes supplied with a selection of pre-printed paper labels ready to fit. A plain label is also supplied, customisation is simple with a labelling machine.

Fold	PRESS TO OPEN Press for Assistance	Fold		Fold Fold	Press in Emergency Press to Acknowledge	Fold	Fold	EMERGENCY	Fold Fold
Fold	EMERGENCY CALL	Fold		Fold	PRESS FOR ALARM	Fold	Fold	PRESS TO SET	Fold
Fold	Press to SILENCE	Fold		Fold	PRESS TO RESET	Fold			
Fold	PRESS TO CLEAR	Fold		Fold	PRESS TO CALL	Fold		Ter 9 0	
		Fold	↓ -12mm-			surfac			





DWG 60116