

Installation Instructions

Single gang Interlock accessories

This instruction covers the following products:

S1718SNT, S1718BSNT, S1717S and S1718S.


These items are supplied with a back box for flush mounting. They can be surface mounted with a S0610 pattress.

NOTE:

The LEDs are current limited for 12 vdc operation.


The button contacts are rated at 1A @ 30vdc resistive, N.O. press to close.

They should **NOT** be used for switch feeds to door strikes or mag locks etc..

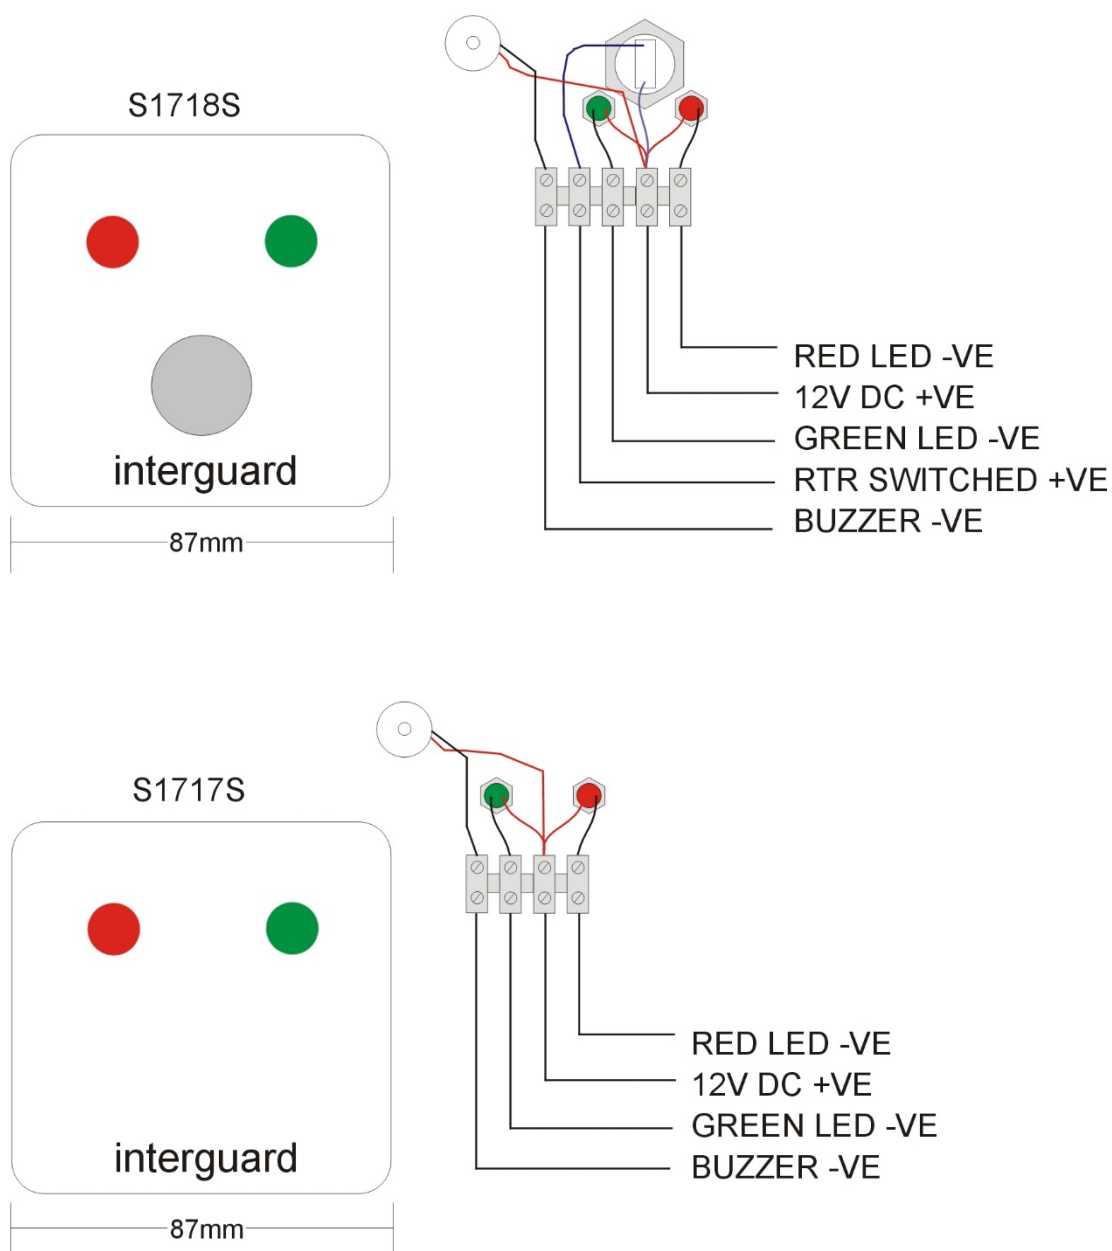

Time adjust
min 0.5sec
max 30sec

Range adjust
min 4cm
max 15cm

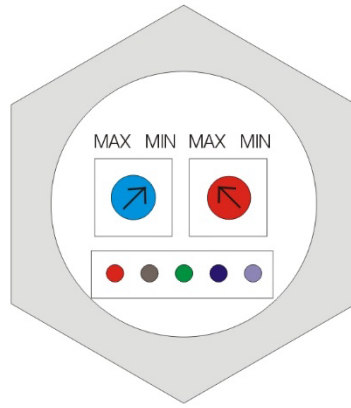

Please Note: No Touch Infra-Red button is normally illuminated Red and while activated illuminates Green

