

# Aidalarm

Mains Powered - A600LKITM & A600LKITMD



This mains powered kit meets the requirements for emergency signalling systems for disabled persons. It is fully compliant with BS8300 and the Disability Discrimination Act. Everything is provided in the kit (except cable and fixings) to deliver an effective, fully compliant, simple to install and simple to use system. Locating the controller outside of the toilet area eliminates the need for mains wiring within the toilet/washroom avoiding conflict with Part P building regulations. A single pole volt free changeover relay is fitted for connection to a remote indicator or a building management system.

## How the Aidalarm works:

- The Aidalarm controller should be sited where staff are located who can respond to an emergency call.
- Ceiling pull cord and optional Dado panic strip or call buttons are situated in the toilet or other area where assistance may be required.
- Pulling the cord or pressing the panic strip/call button generates an immediate audible/visual alarm at both the WC and at the control panel. An LED illuminates on the pull cord giving the caller reassurance the call has been placed.
- The call can be silenced by pressing the button on the front of the control panel.
- The audible indicators at the WC will bleep every 5 seconds to re-assure the caller.
- Should the cord be pulled again while in the silenced state, the system will call again.
- Non-attendance will cause the panel to bleep every 40 seconds as a warning.
- The system can only be reset by the Press to Reset button located at or near the point of call.

- DDA & BS8300 Compliant
- Controller with High Power Piezo Sounder
- Four selectable Warning Tones
- Mains Powered with Standby batteries
- Audible & Visual Signalling to remote point
- Ceiling Pull Cord with LED
- Pull Cord Instruction Label with Braille
- Reset Button with LED, Sounder & Braille
- Overdoor Audible Visual Indication
- Relay output
- Optional Call Buttons
- Battery powered version (A600LKITB) available

## A600LKITM includes:


- 1 x A600L mains powered Aidalarm controller
- 1 x S1600-R Pull cord with re-assurance LED
- 1 x LAB35107 Pull Cord instruction label with braille
- 1 x S1708A Aidalarm Reset button with re-assurance LED, sounder and braille
- 1 x S1778A Aidalarm Overdoor light and sounder
- 6 x AA Standby batteries

## A600LKITMD includes:

- 1 x A600L mains powered Aidalarm controller
- 1 x S1600-R Pull cord with re-assurance LED
- 1 x LAB35107 Pull Cord instruction label with braille
- 1 x S1708A Aidalarm Reset button with re-assurance LED, sounder and braille
- 1 x S1778A Aidalarm Overdoor light and sounder
- 1 x RPD01000 1m water proof panic strip
- 6 x AA Standby batteries



Optional accessories such as Press to Call push buttons can be added to suit requirements

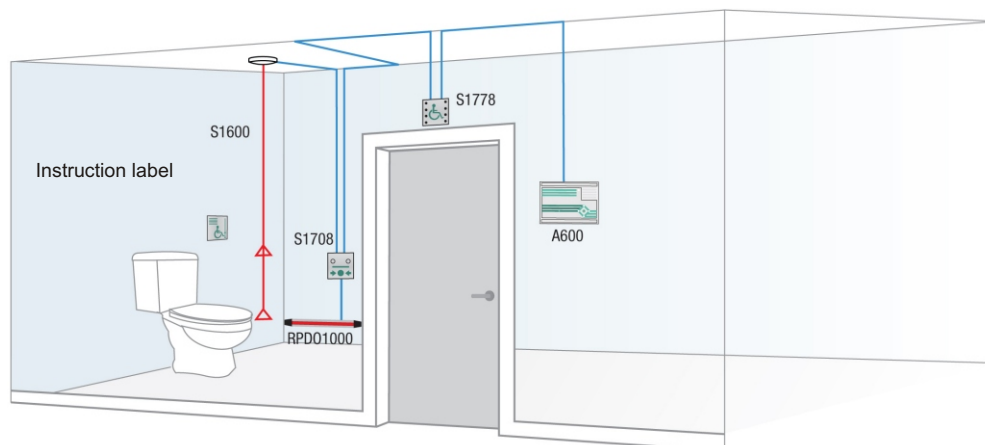

## Hoyles Electronic Developments Ltd

T. 01744 886600

F. 01744 886607

E. sales@hoyles.com

W. www.hoyles.com

