



IGSFB Installation Guide

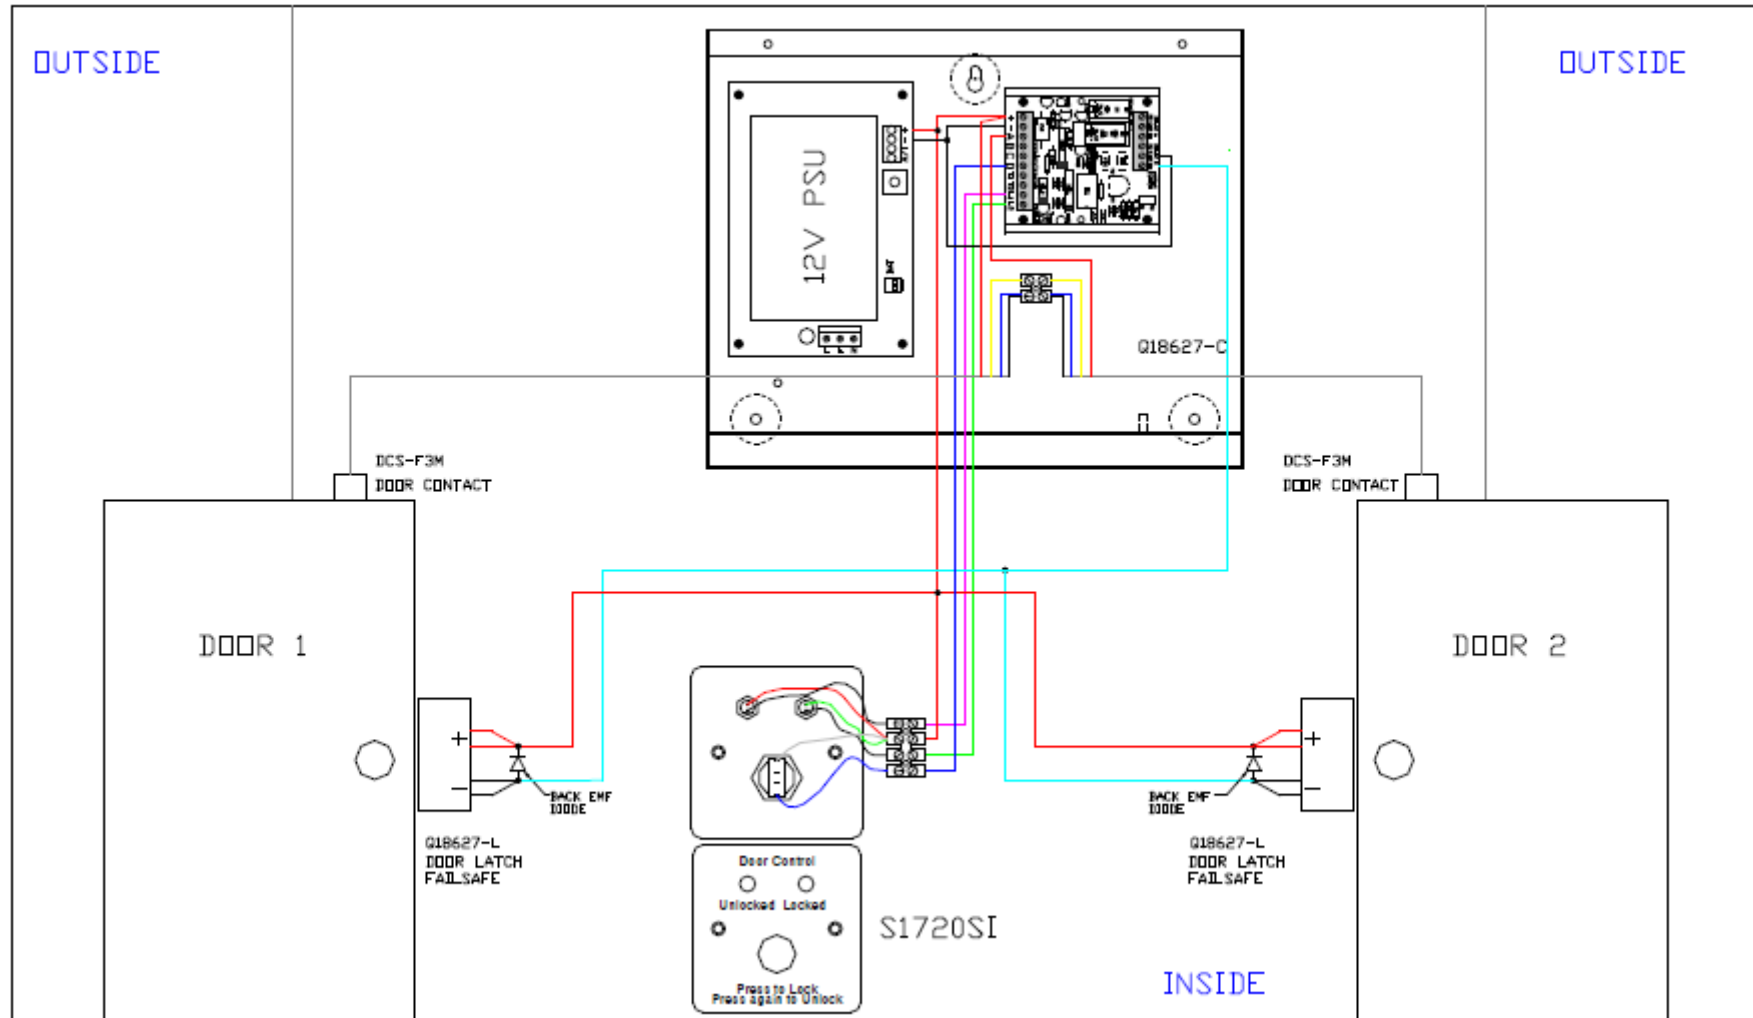

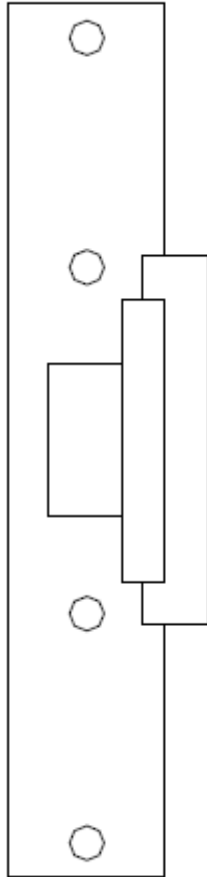

TO CHANGE THE LOCK FROM FAIL SECURE TO FAILSAFE, REMOVE SCREW A, SLACKEN SCREW B AND SLIDE IT IN THE SLOT, REPLACE SCREW A IN FAIL SAFE POSITION.

FOR 12V DC OPERATION LINK THE WIRES AS TWO PAIRS, ONE PAIR RED AND THE OTHER PAIR BLACK

