

Customisable General Purpose Button with Sounder and LED's

S1703P

A wall mounted general purpose button in white ABS complete with a single gang mounting box. This is a non-latching unit with a N/O contact. The LEDs are available in RED, BLUE, GREEN or YELLOW. The LEDs and sounder have separate terminals for acknowledge purposes.

The LED and sounder current limit resistor is provided for 12vdc operation. The button contacts are rated at 50mA at 24vdc. N/O press to close.

They should NOT be used for switch feeds to door strikes or mag locks etc.

The S1703P comes supplied with a selection of pre-printed paper labels ready to fit. A plain label is also supplied, customisation is simple with a labelling machine.

Specification	S1703P
Led Current	35mA @12vdc
Sounder Current	25mA@12vdc
Switch Contact	50mA @12vdc Normally Open
Visual Indication	2 x LED's
Integral Sounder Level	70db @10cm
Tamper	N/A
Material	White ABS
Dimensions	87 x 87 x 36 mm
Weight	0.12kg
IP Rating	IP44 - To maintain the IP rating a suitable sealant or gasket for the rear of the plate is required
Approvals	UKCA and CE marked, ROHS compliant


Available as:	
S1703PR	Button with re-assurance Red LED's and sounder
S1703PB	Button with re-assurance Blue LED's and sounder
S1703PG	Button with re-assurance Green LED's and sounder
S1703PY	Button with re-assurance Yellow LED's and sounder




Benefits and Features

- ABS back box supplied for surface mount
- Can be semi flush mount onto single gang galvanised back box (not supplied)
- Mark resistant decal
- Tactile button
- Two high brightness LEDs
- Integral sounder
- Unique on site labeling system

Dimensions (mm)

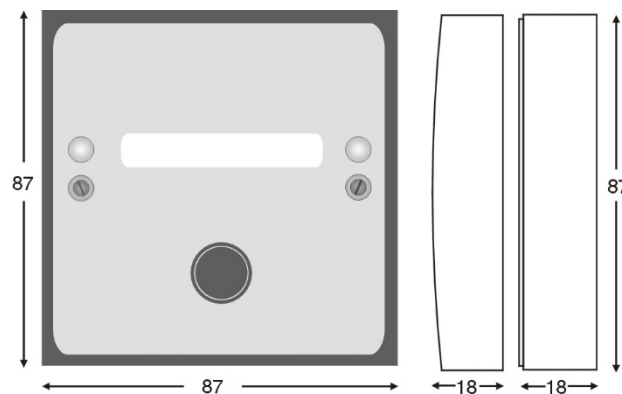

Before applying decal ensure surface is clean and free from dust and grease etc..

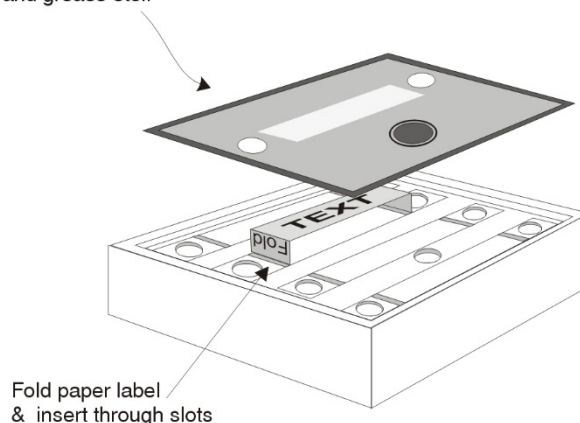

Fold paper label & insert through slots