

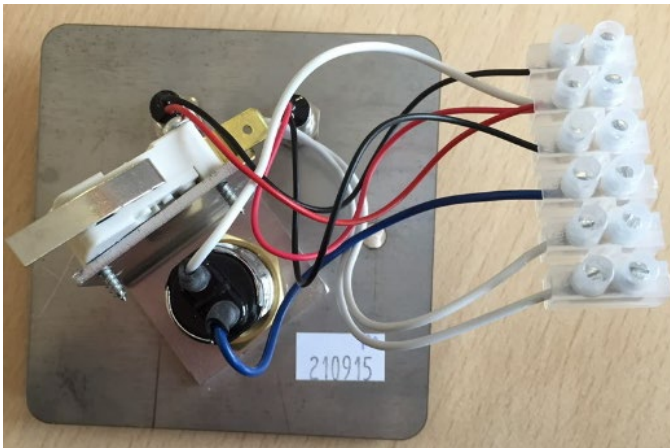
Request to Release Keyswitch

S1718KSW

A high security momentary action keyswitch together with one red and one green LED on a single gang stainless steel plate. Designed for use with our range of InterGuard door interlock controllers but usable in many other applications. The keyswitch has single pole contacts which are open going closed when the key is turned. The LEDs are terminated for 12vdc operation. High security keyswitch 50,000+ differs.

Specification

Led Current	20mA per LED @12vdc
Switch Contacts	Momentary switched +ve
Visual Indication	1 x green LED 1 x red LED
Integral Sounder Level	N/A
Tamper	Yes
Keyswitch	High security keyswitch 50,000+ differs
Material	316 Grade Stainless Steel
Dimensions	86mm x 86mm x 2mm (Facia) 47mm galvanised back box
Weight	0.30kg
IP Rating	IP54 - To maintain the IP rating a suitable sealant or gasket for the rear of the plate is required
Approvals	UKCA and CE marked, ROHS compliant

S1718KSW Wiring Detail**Benefits and Features**

- Brushed Stainless Steel
- Supplied with 47mm deep galvanised mounting box for flush fitting
- IP Rated
- Customised versions available on request
- Surface mount using S0610-50
- Tamper switch

**Dimensions (mm)**