

## Relay Module

S312N-B

Boxed General purpose transistor driven interface relay. This device accepts a variety of input conditions (Voltage, Logic, Closed Circuit and Open Circuit) for interfacing various signals via voltage free DPCO contacts.


## Benefits and Features

- Box tamper Switch
- Supplied in single gang enclosure
- 12 vdc powered
- Transistor driven interface relay
- Screw terminals for easy connection
- Manufactured in the UK


Specification	S312N-B
Led Current	N/A
Switch Contacts	DPCO contacts rated at 2A
Visual Indication	1 x Red
Integral Sounder Level	N/A
Supply Voltage	12vdc
Supply Input Current	40 mA max
Tamper	Yes
Material	PCB Module in ABS box
Dimensions	80 x 74 x 16 mm (Relay) 87 x 87 x 36 mm (Box)
Weight	0.118kg
IP Rating	N/A
Approvals	UKCA and CE marked, ROHS compliant



## Dimensions

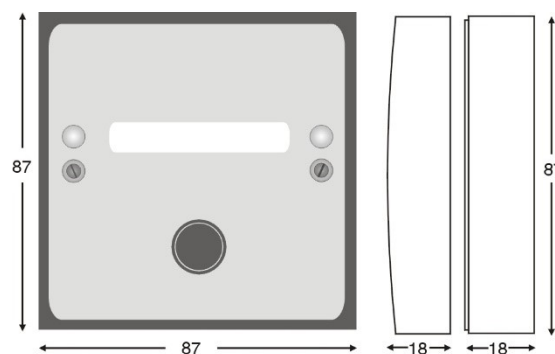

Before applying decal ensure surface is clean and free from dust and grease etc..

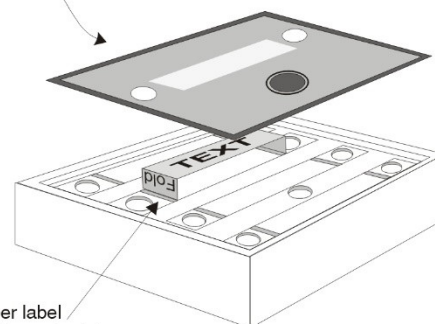

Fold paper label  
& insert through slots