

Firepoint Extinguisher Alarm

The Firepoint FP100 is a different kind of fire extinguisher alarm, providing both a theft deterrent and peace of mind that the extinguisher is maintaining its correct installed weight.

Microprocessor technology fully monitors the presence of a fire extinguisher and checks the weight of the extinguisher every second.

As soon as the extinguisher is removed a high pitched integral sounder gives a continuous warning for 30 seconds even if the extinguisher is replaced. After 30 seconds this reduces to an intermittent alarm. If after a further 90 seconds the extinguisher is still not returned then a quad bleep will be heard periodically. This system of reducing alarms gives adequate warning and at the same time reduces the annoyance to building occupants without the need to switch the Firepoint off.

If the extinguisher is replaced in a discharged or partly discharged condition (i.e. 15% reduction in gross weight) the Firepoint will quad bleep until the extinguisher has been recharged and replaced.

If the extinguisher has been overfilled (ie 15% increase in gross weight) and replaced after use the Firepoint will give an intermittent alarm to warn that the extinguisher is in a dangerous condition. A reassurance bleep is given when the extinguisher is correctly replaced and charged to its original installed weight.

Firepoint is battery powered. The battery should normally last for 2 - 3 years. Its microprocessor not only checks the fire extinguisher but also the battery capacity. Long before the battery is exhausted the Firepoint will start to give a warning bleep.


An engineer set up mode is included to enable the Firepoint to be adjusted to take virtually any make, type and size of fire extinguisher. The hanging strap is multi-punched for all popular brackets and can be drilled to take non-standard fittings. The steel chassis plate has three fixing points, spreading the load when fixing to plasterboard and other weak surfaces. The plastic cover is interlocked to prevent tampering but enables easy battery replacement and set up.

- Integral Sounder
- Battery powered
- Low battery monitor
- Steel Plated chassis
- Multiple Fixing Points
- Suits most types & sizes of extinguisher
- Reduces Fire Extinguisher theft
- Checks for underweight & overweight
- Great fixing on weak surfaces
- Remote monitor output



Dimensions 165w x 40d x 150h mm
Long hanging strap 225mm

Multiguard six zone indicator

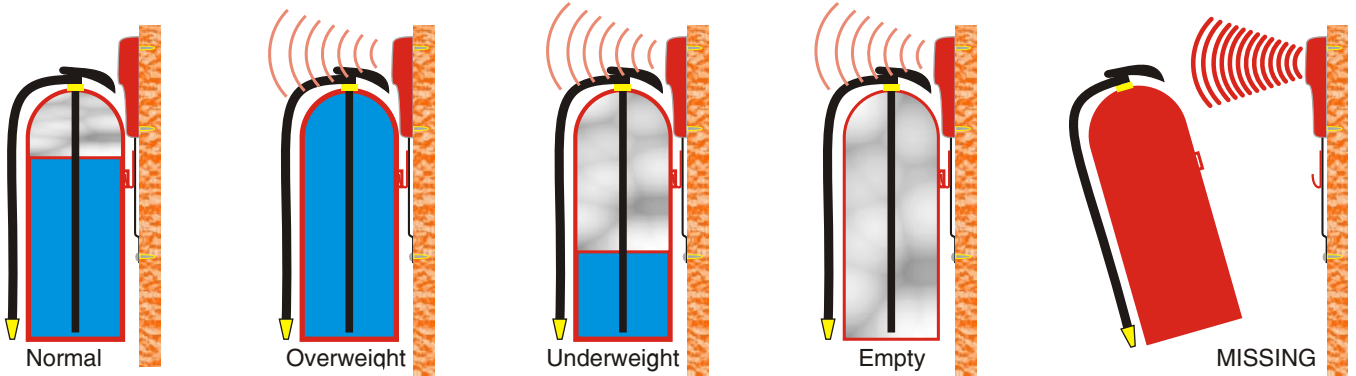

Hoyles Electronic Developments Ltd

T. 01744 886600 F. 01744 886607 E. sales@hoyles.com W. www.hoyles.com