

Staff Pass Kits

EXF2S/BK, EXF2S/DK, EXF2S/MK

The Staff Pass feature utilises a pass code which temporarily isolates the alarm to allow access to store rooms etc... An exit button is fitted inside the alarmed room which when isolates alarm allowing users to exit. If the door is opened without either the code being entered or button pressed the high power alarm will sound.


Staff Pass Kits are available complete with Push to Exit button. Battery, 12vdc and mains powered available.

Benefits and Features

- Keypad control
- Sounder 108db maximum
- Six selectable alarm tones to suit your environment
- Front and back acting tamper switch
- Manager code restricting users from changing various features
- User pass / reset code
- Bleep in off option reminds users that Kit is switched off
- Alarm strobe for visual alarm indication
- Alarm relay outputs on EXF2S/DK and EXF2S/MK
- Battery condition monitor on EXF2S/BK
- On - off monitor relay on EXF2S/DK
- Output for Multiguard connection
- Robust ABS enclosure



Dimensions (mm)

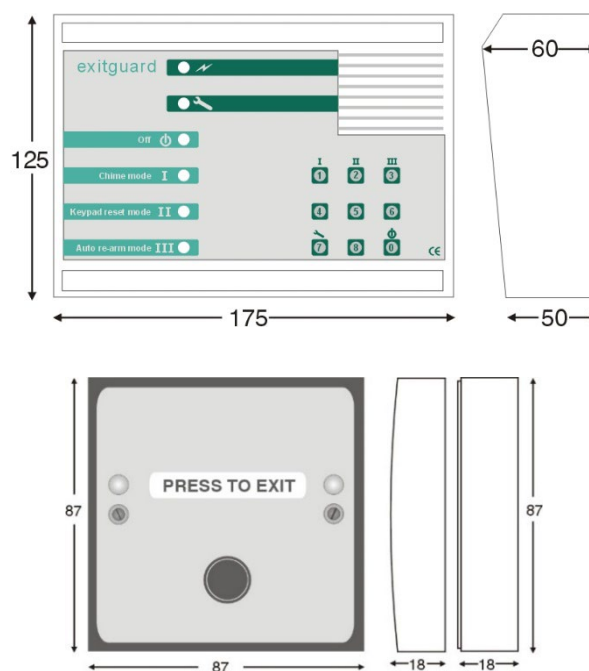

Staff Pass Door Alarm Kit Series model comparison

Specification	EXF2S/BK	EXF2S/DK	EXF2S/MK
Battery Monitor	Yes	No	Yes
On/Off Monitoring Relay	No	SPCO 1A 30vdc	No
Supply Voltage	Battery or 7v -14vdc	12vdc -14vdc	220/240vac
Supply Current	35mA quiescent 80mA max	45mA quiescent 155mA max	< 0.5A
Batteries(supplied)	6 x AA alkaline	No	6 x AA alkaline
108db Sounder	Yes	Yes	Yes
Alarm Relay Contacts	No	SPCO 1A 30vdc	SPCO 1A 30vdc
Auxiliary Power O/P	No	No	200mA @12vdc