

## Anti-Ligature Ceiling Pull Cord Set

S1600ALRKT, S1600ALOKT

Non-latching ceiling pull cord with re-assurance LED and 3m long wipeable anti-ligature cord set. These units have voltage free SPCO contacts. The LED incorporates a current limit resistor for use on 12vdc.

Red ceiling pull cords are supplied as standard in all of our Aidalarm Disabled toilet alarm kits. If you are installing an anti-ligature ceiling pull cord into a disabled toilet it should be Red.


Once fitted the S300CLAM is not designed to be tampered with, if the cord needs to be replaced or moved, then a new clam should be used.

Please remember that for nurse call pulls, to comply with legislation you must have 1 bangle 100mm from the floor and another bangle 800mm - 1000mm from the floor.

***It is considered against best practise to install a non anti ligature pull cord into a mental health unit due to the risk it poses.***

Specification	S1600ALRKT & S1600ALOKT
Led Current	20mA
Switch Contacts	SPCO 5A @ 125/250vac
Visual Indication	Red LED
Integral Sounder Level	N/A
Tamper	N/A
Material	ABS/Nylon
Dimensions	Ø86 x 31 mm
Weight	0.64kg
IP Rating	N/A
Approvals	UKCA and CE marked, ROHS compliant


## Dimensions (mm)

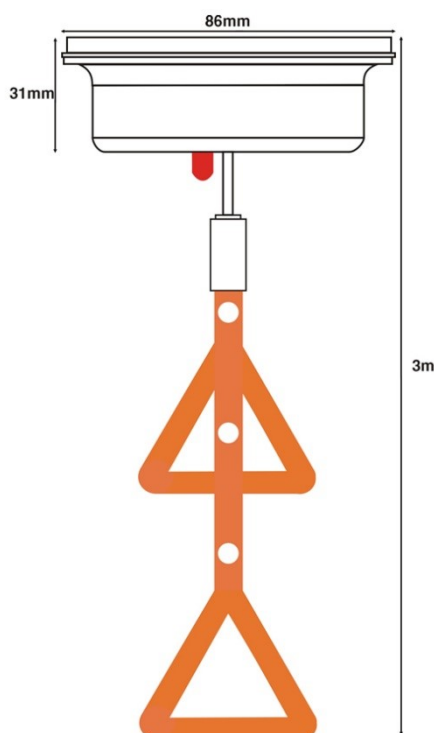

## Benefits and Features

- Re-Assurance LED
- Current limit resistor
- Single Pole
- 3m Anti Ligature cord set
- Cord manufactured from vinyl
- Hygienic and Wipeable
- Non-latching Momentary switch
- Replacement Anti Ligature ceiling pull cords available

## Inside the box

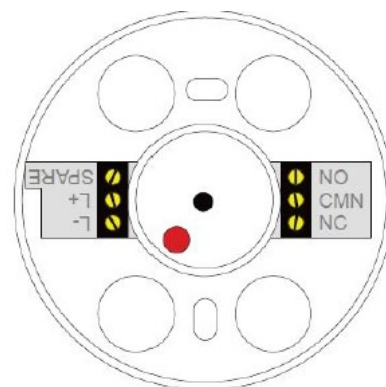

S1600ALOKT



S1600ALRKT

